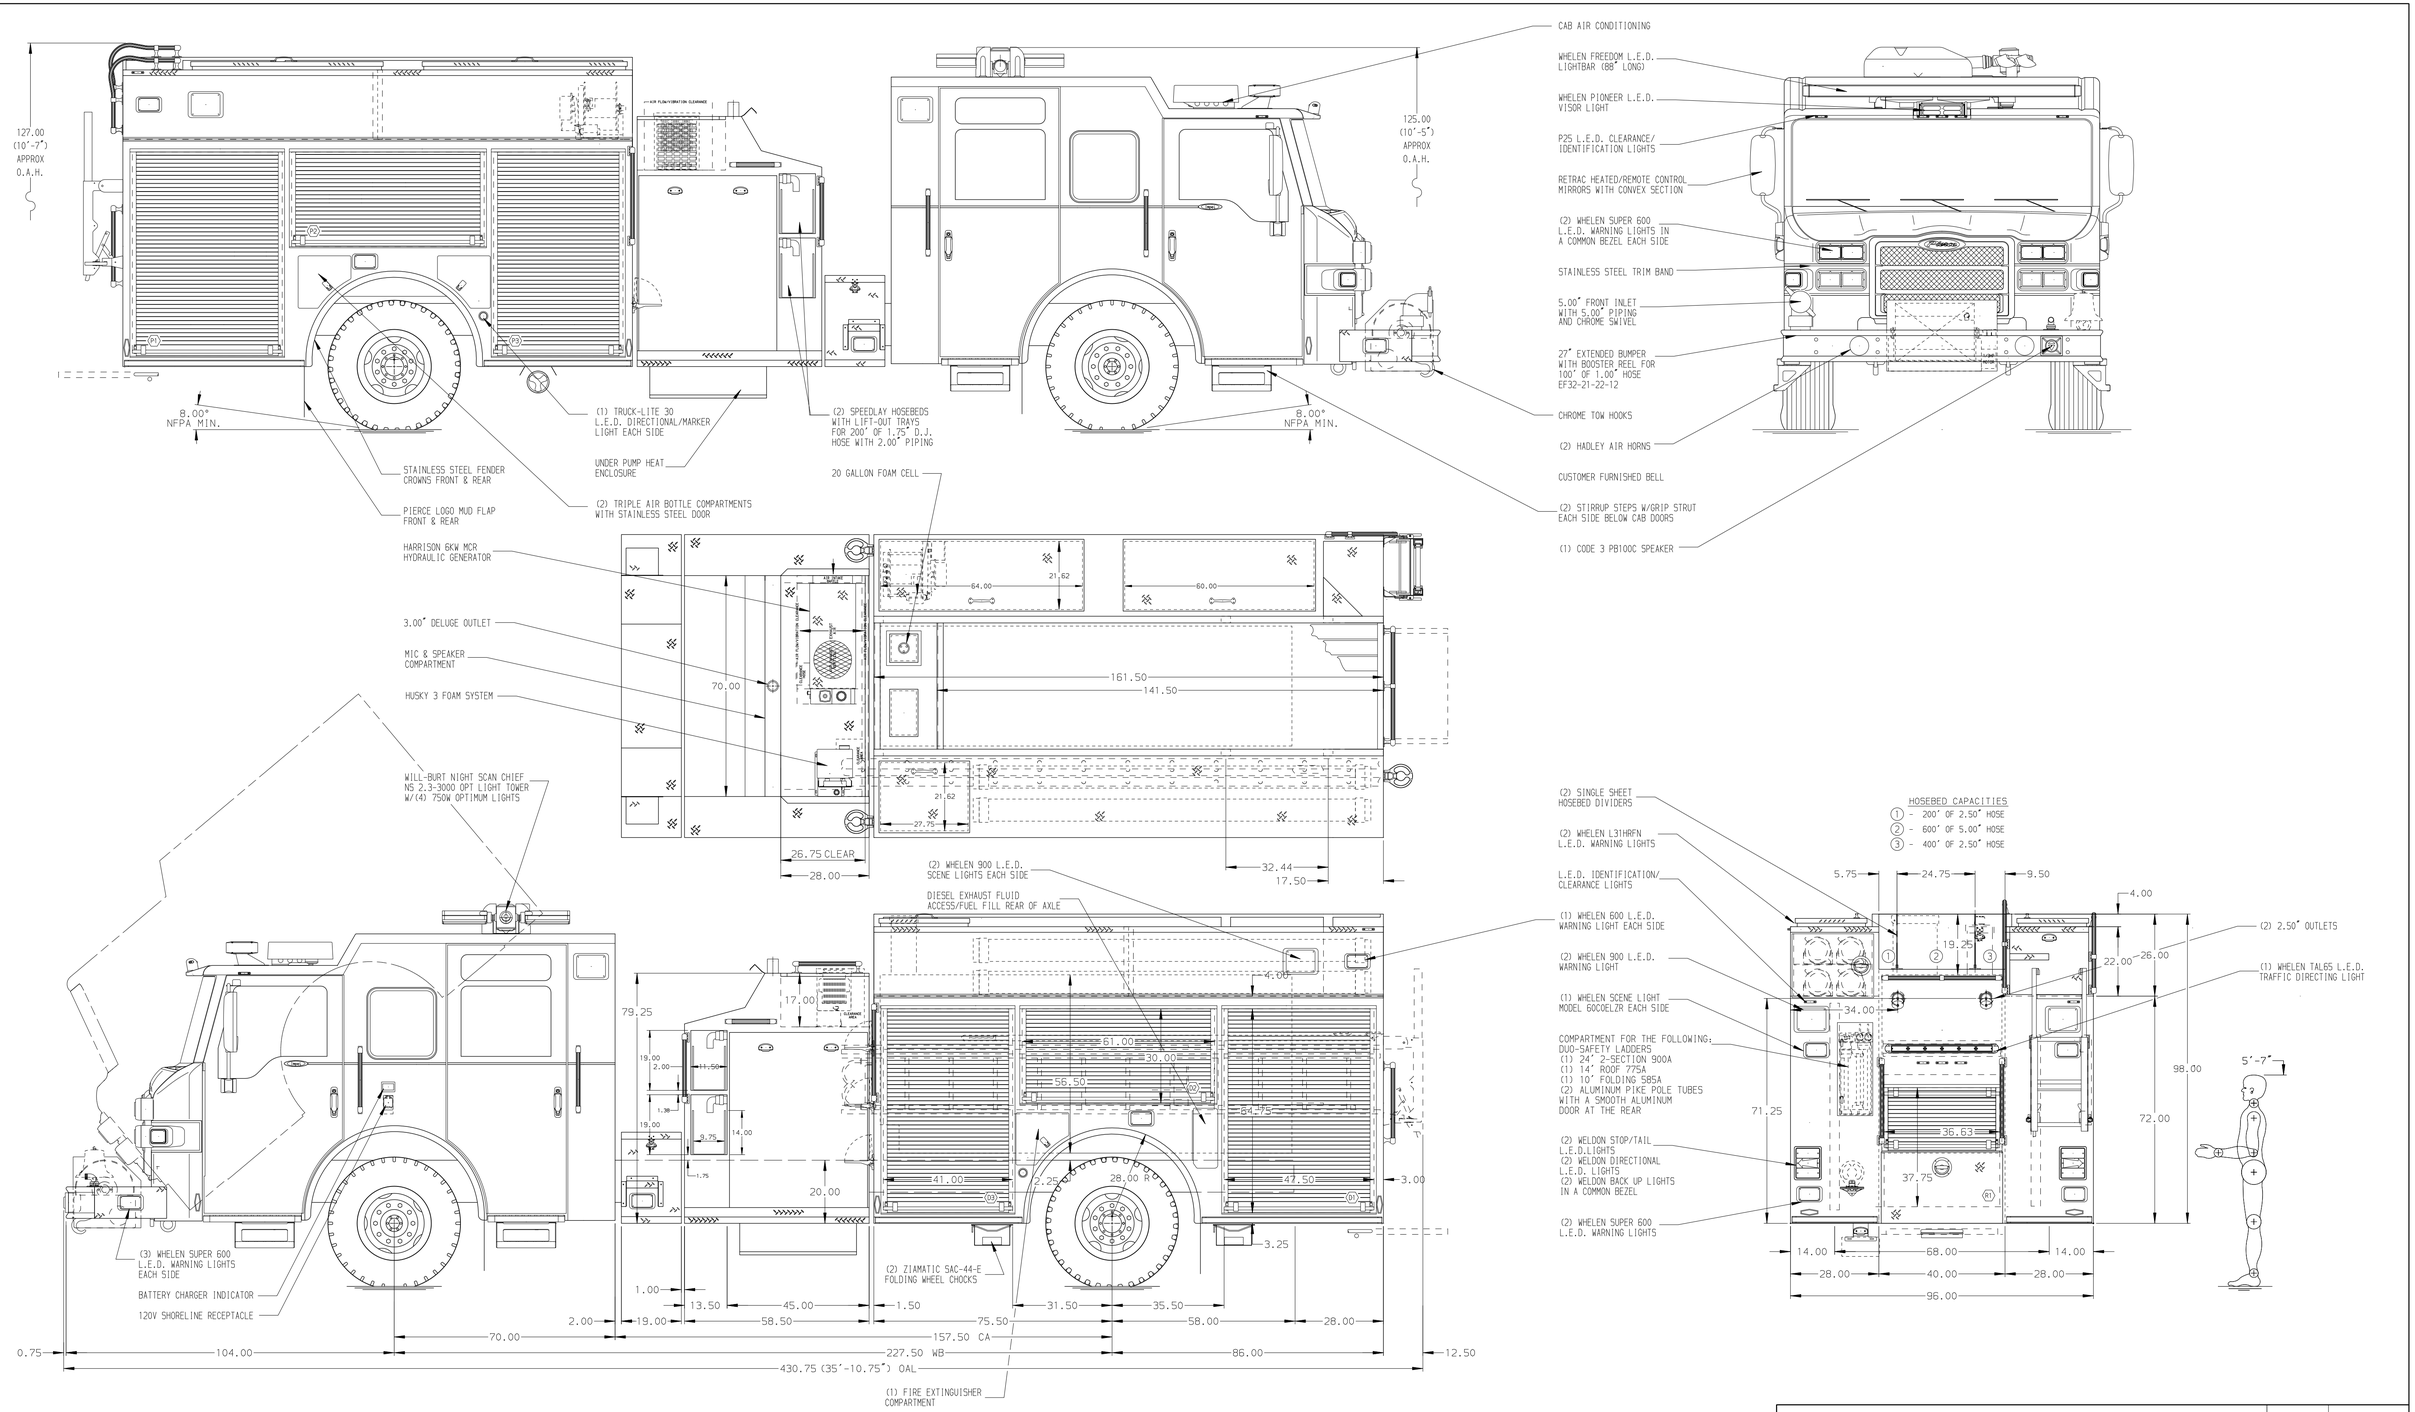

ALUMINUM BODY

MAXIMUM O.A.L. 431.00"

FRONT IMPACT & SIDE ROLL PROTECTION

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. ALUMINUM TREADPLATE EXTERIOR REAR WALL OF CAB
2. PERIMETER SCENE LIGHTS LOCATED PER SHOP ORDER
3. PIERCE L.E.D. DUAL COMPARTMENT LIGHT STRIPS LOCATED PER SHOP ORDER
4. SHELF TRACKS LOCATED IN COMPARTMENTS D1, D3, P1, P2, P3, AND R1
5. ONE FULL WIDTH/DEPTH PAINTED ADJUSTABLE SHELF IN COMPARTMENTS D1, D3, P1, P3, AND R1
6. ONE FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT P1
7. ONE ADJUSTABLE HEIGHT TILTING SLIDE OUT-TRAY LOCATED IN COMPARTMENT P2
8. ONE SWING-OUT TOOLBOARD LOCATED IN COMPARTMENT D2
9. CTECH DRAWER ASSEMBLY IN COMPARTMENT D3
10. CIRCUIT BREAKER PANEL IN COMPARTMENT D3
11. ONE HANNAY ELECTRIC REWIND CORD REEL MODEL 1618-17-18 LOCATED IN HATCH COMPARTMENT ABOVE P3 WITH 200' OF 10/3 CABLE
12. TWO 120V RECEPTACLES ONE ON EACH PUMP PANEL PER SHOP ORDER

REV	DATE	BY	CH
1	20MAY14	SBU	JBO
2	18APR14	SBU	JBO
3	24FEB14	BZI	SHA

CHASSIS DATA
MAKE: PIERCE
MODEL: IMPEL

Pierce MANUFACTURING INC.

TITLE: 1250-D-1020 1000 GAL WATER W/20 GAL FOAM,PMPR,DS FL HGHT FRNT & REAR,PS FULL HGHT & DPTH COMPTS,LDDRS DS

FOR: GRANITE FALLS FIRE DEPARTMENT
GRANITE FALLS, MN

DWG NO.: 27671AD

JOB NO.	27671
SCALE	1:24
DATE	
DRAWN BY	SBU 11FEB14
CHECKED BY	BZI 14FEB14
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 22-JUN-2015 11:17:48