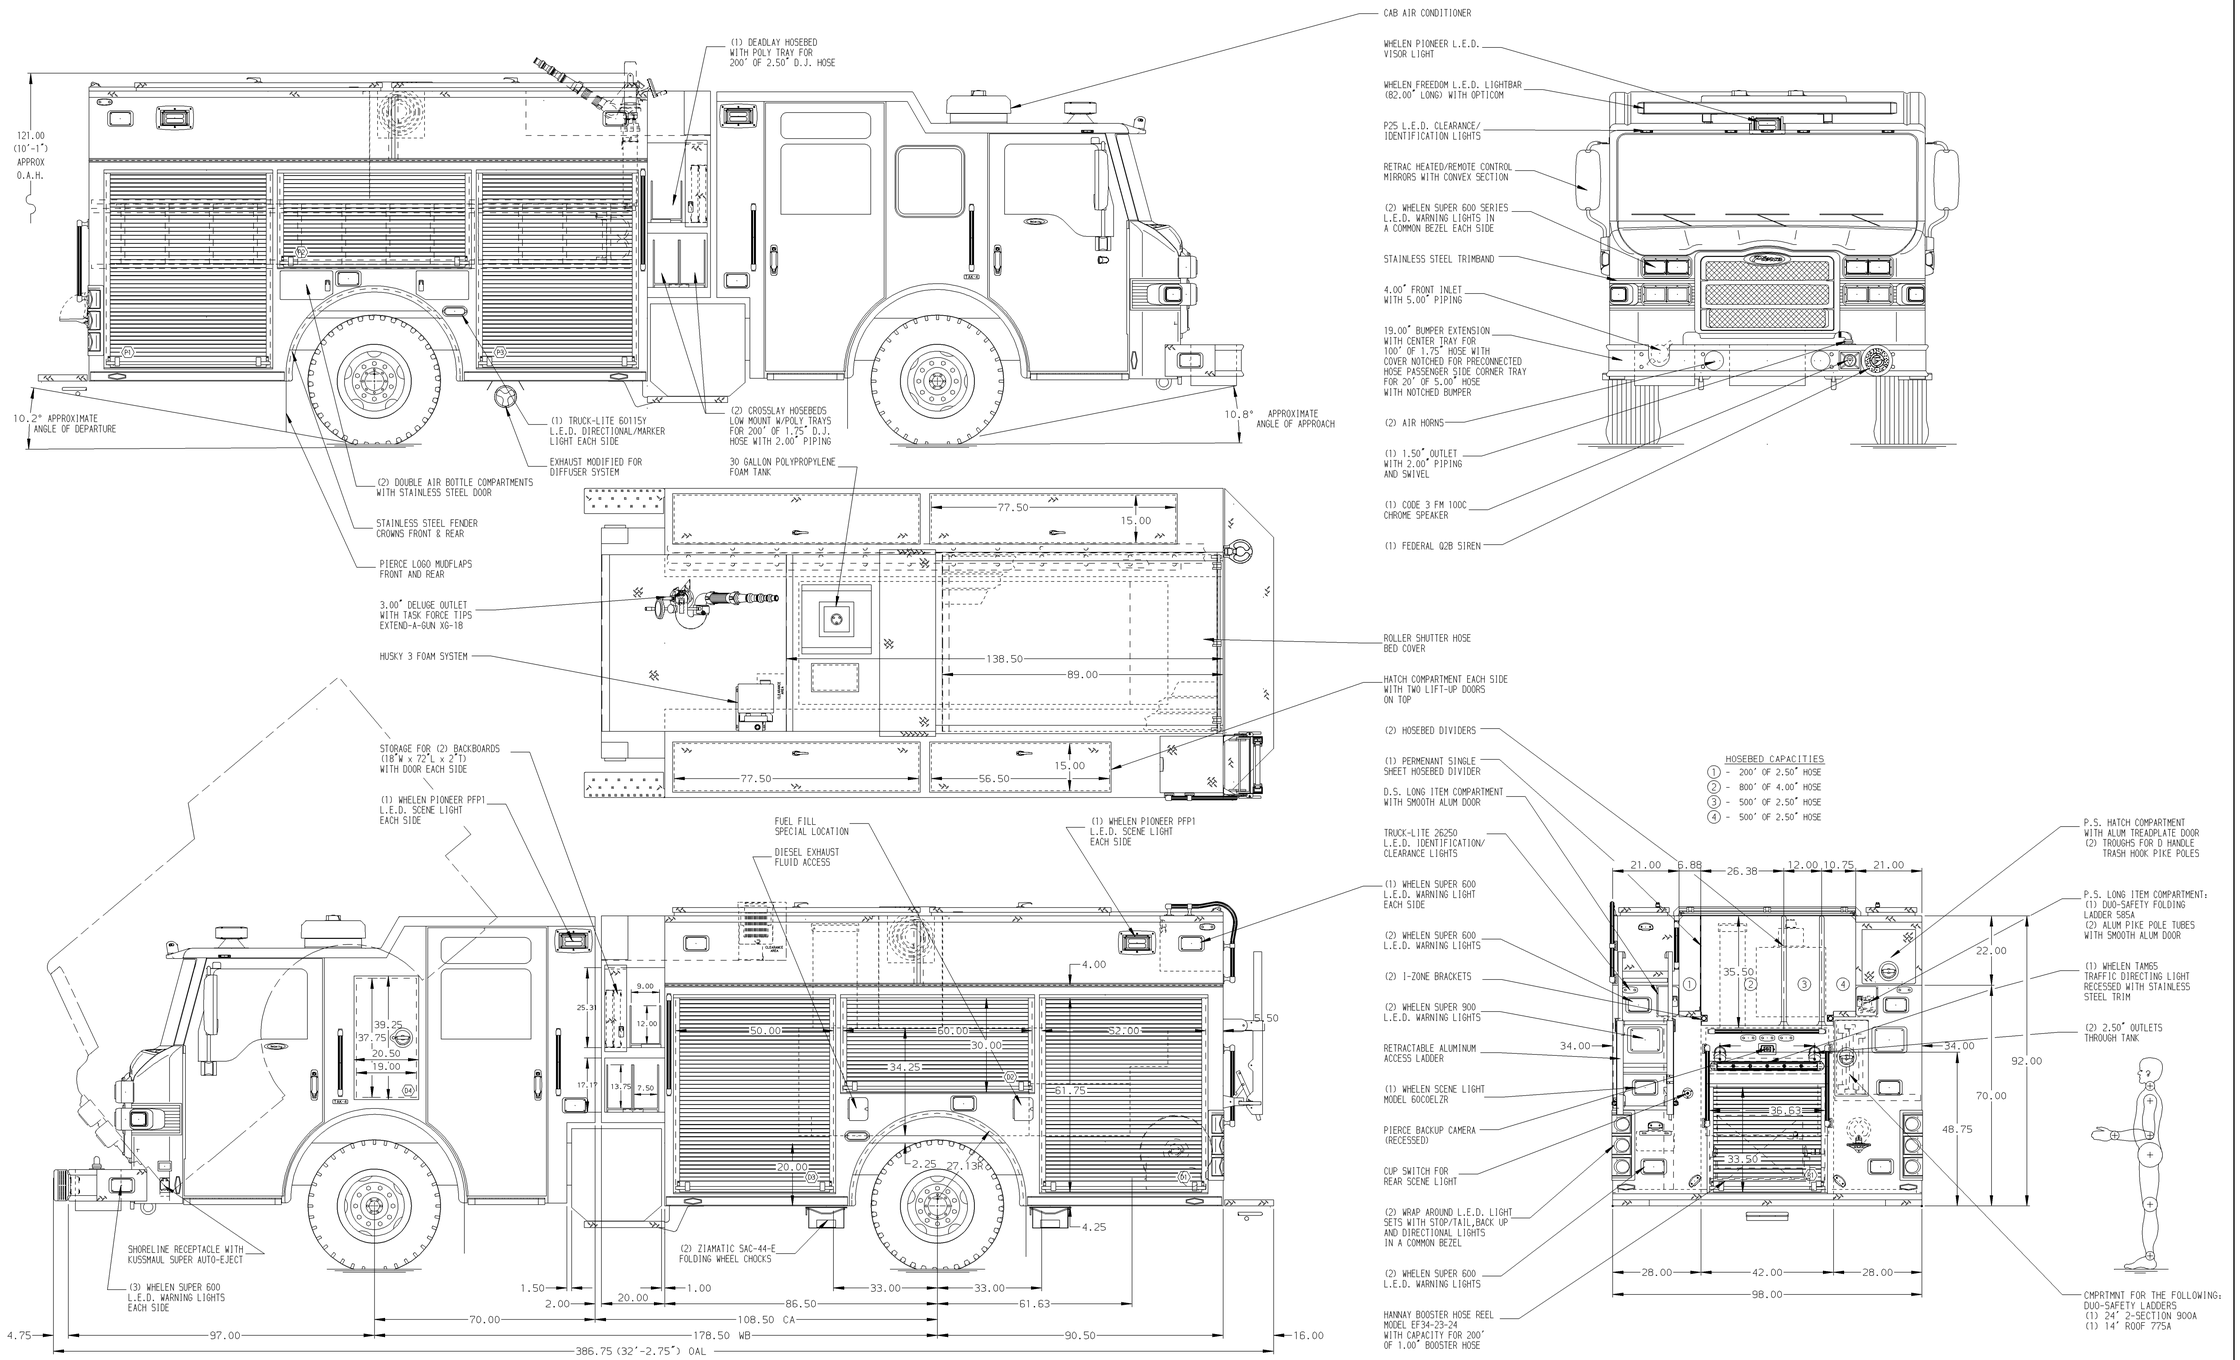

ALUMINUM BODY

MAXIMUM O.A.H. 121.00"

NOTE

DIMENSIONS SHOWN ARE APPROXIMATE AND ARE SUBJECT TO MINOR DEVIATIONS AS MAY OCCUR OR BE NECESSARY IN CONSTRUCTION.
MINOR DETAILS NOT SHOWN.

1. S/STL SCUFFPLATE ON EACH CAB DOOR JAMB
2. S/STL SCUFFPLATE ON REAR OUTER CORNERS OF CAB
3. MOUNTING BASE FOR ANTENNA LOCATED PER SHOP ORDER
4. BATTERY CHARGER LOCATED BEHIND DRIVER'S SEAT
5. PIERCE L.E.D. DUAL COMPARTMENT LIGHT STRIPS LOCATED PER SHOP ORDER
6. ONE ADJUSTABLE FULL WIDTH/FULL DEPTH SHELF IN COMPARTMENT D2 TWO IN D1, D3, AND P2, THREE IN P1 AND P3
7. ONE PAINTED FLOOR MOUNTED SLIDE-OUT TRAY IN COMPARTMENT D1
8. TWO PAINTED ADJUSTABLE SLIDE-OUT TRAYS IN COMPARTMENT D3
9. SLIDE-OUT TOOLBOARD WITH PAC TRAC MOUNTING TRACKS IN COMPARTMENT D1
10. ONE VERTICAL PARTITION IN COMPARTMENT D1
11. TWO I-ZONE BRACKETS LOCATED AT THE REAR PER THE SHOP ORDER

REV	DATE	BY	CH
7	13MAY14	COL	AS1
6	07MAY14	BZI	AS1
5	05MAY14	SBU	AS1
4	29APR14	SBU	AS1
3	08APR14	SBU	AS1

CHASSIS DATA: MAKE PIERCE; MODEL VELOCITY

Pierce MANUFACTURING INC.

TITLE: 1500-D-500 500 GAL WATER,30 GAL FOAM TANK, 177" PUC FULL HGHT & DPTH COMPTS,LDDRS IN PS BODY, (2)XLAYS

FOR: ANAHEIM FIRE DEPARTMENT
ANAHEIM,CA,USA

DWG NO. 27497AD

JOB NO.	27497 01-02
SCALE	1:24
DATE	
DRAWN BY	SBU 10DEC13
CHECKED BY	GRM 16DEC13
SHEET SIZE	D
SHEET NO.	1 OF 1

View File Created 13-MAY-2014 07:18:44